

JONSERED 1420S




JONSERED 1420S BASIC DATA

Technical data	J1420S 79	J1420S 96
Max. lifting capacity (kNm)	136	129
Hydraulic outreach* (m)	7.9	9.6
Number of extensions	1	2
Outreach - lifting capacity, standard (m - kg)	3.0 - 4200 4.0 - 3250 5.0 - 2650 6.0 - 2260 7.0 - 1940 7.9 - 1640	3.0 - 3650 4.0 - 3100 5.0 - 2550 6.0 - 2160 7.0 - 1840 8.0 - 1580 9.0 - 1400 9.6 - 1250
Slewing system	Double	
Slewing angle (°)	425	
Slewing torque, gross (kNm)	32.1	
Max. working pressure (MPa)	26	
Recommended oil flow – fixed pump (I/min), 1-pump	80	
Recommended oil flow – fixed pump (I/min), 2-pump	2x80	
Min. recommended oil flow – variable displacement pump (l/min)	160	
Weight - High seat crane with standard stabilizer (kg)*	2180	2320
Weight - Cabin crane with standard stabilizer (kg)*	2590	2730

^{*} Weight with fixed pump system, oil weight included

Side view

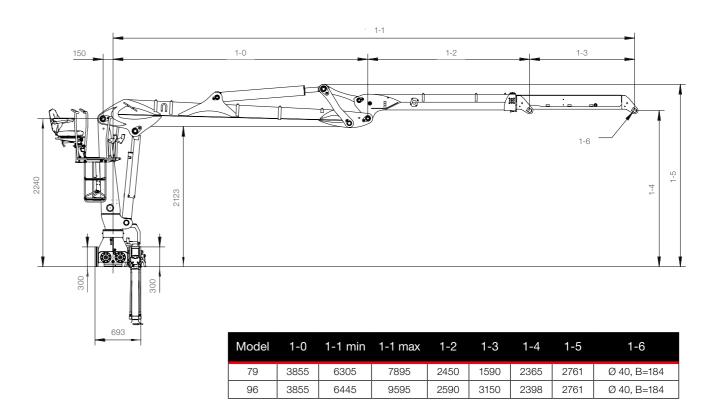



BUILT TO PERFORM

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts and MULTILIFT demountables, as well as DEL, WALTCO and ZEPRO tail lifts.

hiab.com

Hiab is part of Cargotec.

cargotec.com

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.

