


JONSERED 1400Z



JONSERED 1400Z BASIC DATA

Technical data	J1400Z 80	J1400Z 95			
Max. lifting capacity (kNm)	136	127			
Hydraulic outreach* (m)	8.0	9.5			
Number of extensions	1	2			
Outreach - lifting capacity, standard (m - kg)	3.0 - 3750 4.0 - 3050 5.0 - 2600 6.0 - 2280	3.0 - 3450 4.0 - 2800 5.0 - 2400 6.0 - 2120			
	7.0 - 1940 7.5 - 1800	7.0 - 1820 8.0 - 1560 9.0 - 1240			
Slewing system	Double				
Slewing angle (°)	425				
Slewing torque, gross (kNm)	28.6				
ax. working pressure (MPa) 26					
Recommended oil flow – fixed pump (I/min), 1-pump	70-90				
Recommended oil flow – fixed pump (I/min), 2-pump	2x60-80				
Min. recommended oil flow – variable displacement pump (I/min)	160				
Weight - High seat crane with standard stabilizer (kg)*	2160	2330			
Weight - HiVision crane with standard stabilizer (kg)**	2290	2460			
Weight - Cabin crane with standard stabilizer (kg)*	2570	2740			

Side view

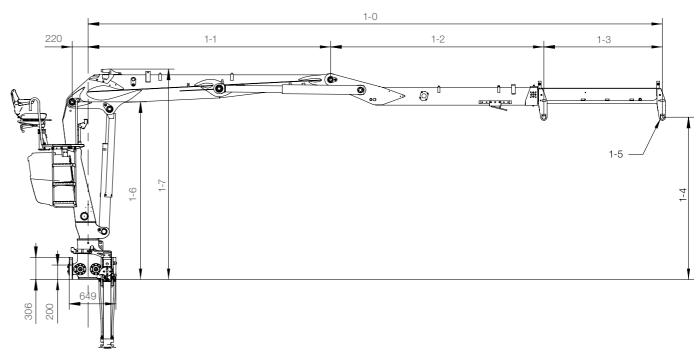

Model	1-0 min	1-0 max	1-1	1-2	1-3	1-4	1-5	1-6	1-7
80	6350	8000	3380	2970	1650	2259	Ø 40, B=184	2473	2930
95	6510	9470	3380	3130	2960	2199	Ø 40, B=184	2473	2930



^{*} Weight with fixed pump system, oil weight included ** Weight with variable pump system, oil weight included

BUILT TO PERFORM

Hiab is the world's leading provider of on-road load handling equipment. Customer satisfaction is the first priority for us. Hiab's product range includes HIAB loader cranes, JONSERED recycling and forestry cranes, LOGLIFT forestry cranes, MOFFETT truck mounted forklifts and MULTILIFT demountables, as well as DEL, WALTCO and ZEPRO tail lifts.

hiab.com

Hiab is part of Cargotec.

cargotec.com

Disclaimer. We reserve the right to make changes. Illustrations, drawings and data are not always in accordance with the latest version or standard model in production. The models in the pictures may present special equipment or colours.

